



*All special machining requirements must be quoted.*

## Oil Grooving - Special Machining

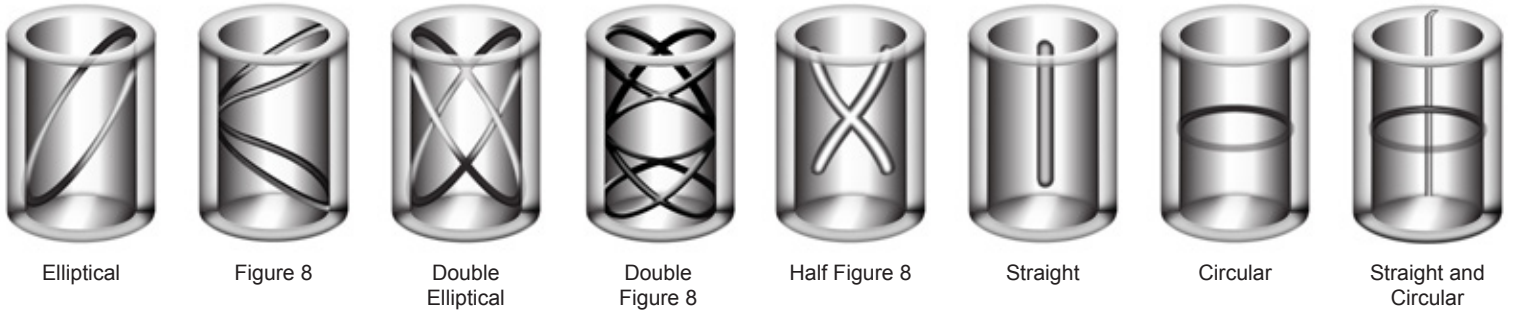

Standard Randall groove styles fulfill most requirements. Special designs or combinations can be furnished if desired. In ordering, specify type and depth of groove and whether it should run out the ends.

## Graphited Bronze Bearings - Special Machining

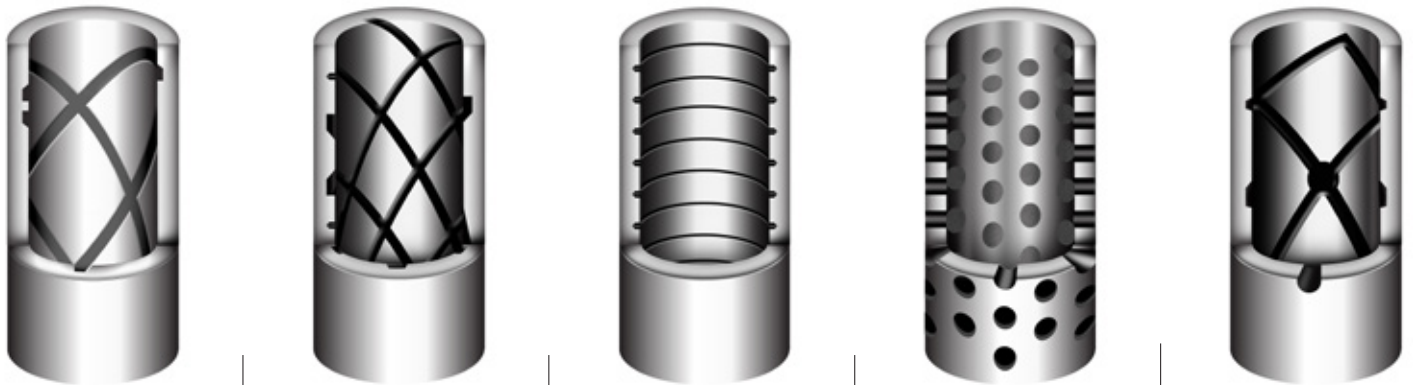

RG 5  
For intermittent light service, or with oil or grease lubrication.

RG 6  
For light loads or intermittent service, to provide ample lubrication without other lubricants.

RG 7  
For lubrication of sliding or reciprocating shaft motion.

RG 8  
For high heat applications. A minimum wall thickness of 1/8" is required for this type of graphiting.

RG 9  
For controlled lubrication in housings with oil reservoir.

# Randall